

PRODUCT DESCRIPTION



WTM236TL-NT is an open frame LED professional monitor. It offers wide viewing angles and clear, crisp images. Its slim design makes self-service equipment more aesthetic, and its various of installation ways make components integrating much more easier.

Typical Application:

Amusement and Entertainment Equipment, KIOSK, Self service Terminal, Interactive Digital Signage, VTM and Way-finding machine, etc.

ADVANTAGES

Easy to Deploy

Plug-and-play. Adapts to universal power :12V DC

Durable and Professional Design

All metal structure, sleek & elegant design, that makes the product durable and stable

Working all around the clock

High quality components to ensure the product reliability

Flexible Installation

VESA mount, heavy-duty stand gives you a choice of fixed or desktop mounting

High Definition LCD Panel

Full HD 1920 x 1080 resolution

TECHNICAL SPECIFICATIONS LCD

> LCD Panel

Backlight	LED
Brightness	250 cd/m ²
Contrast Ratio	3000:1
Viewing Angle	H:178° / V:178°
Response Time	25 ms (GTG)
Supported Colors	16.7M Colors
Display Resolution	1920 x 1080 (16:9)
Display Frame Rate	60Hz
Input Resolution	1920 x 1080 @ 60Hz (Analog) 1920 x 1080 @ 60Hz (Digital)
Connector	1x VGA /1x DVI /1x HDMI

> Mechanical

Dimensions	577.1x 349.4x 44 mm
Package Dimension	685x 155x 475 mm

Weight(approximately)	7 kg / 9 kg
Wall Mount Type	VESA,MIS-D,100,C

> OSD Functions

OSD Control	Push Button
OSD Language	English, Chinese

> Electrical

Power Supply	DC in: DC 12V (50/60 Hz)
Normal Operation	≤ 25W (typ.)
Power Off	≤ 2 W (typ.)

Internal Speaker	no
------------------	----

> Environmental

Operation	0 °C ~ 40 °C, 90% RH
Storage	-20 °C ~ 60 °C, 90% RH

> Options

Other	Wall mounts, Desktop base
-------	---------------------------

Shanghai Headquarter



TEL: +86 (0)21-58361091
400-621-1510

ADD: Room 6206-6207, Building 6, NO.1687 Changyang Road, Yangpu District, Shanghai, China

Beijing Office








TEL: +86 (0) 10-81786110

ADD: Room 1001,Unit 5,Building 2, Tiantongyuan North Second District,Changping District,Beijing,China



Learn more at: www.any-touch.com, email us at: sales@any-touch.com
Specifications subject to change without notice.
Copyright © 2017 Anytouch Technologies Co., LTD



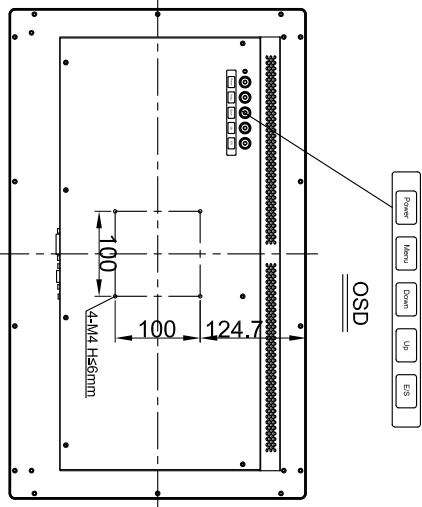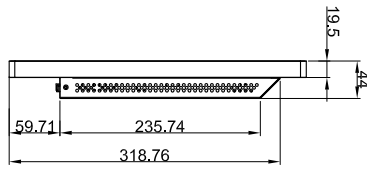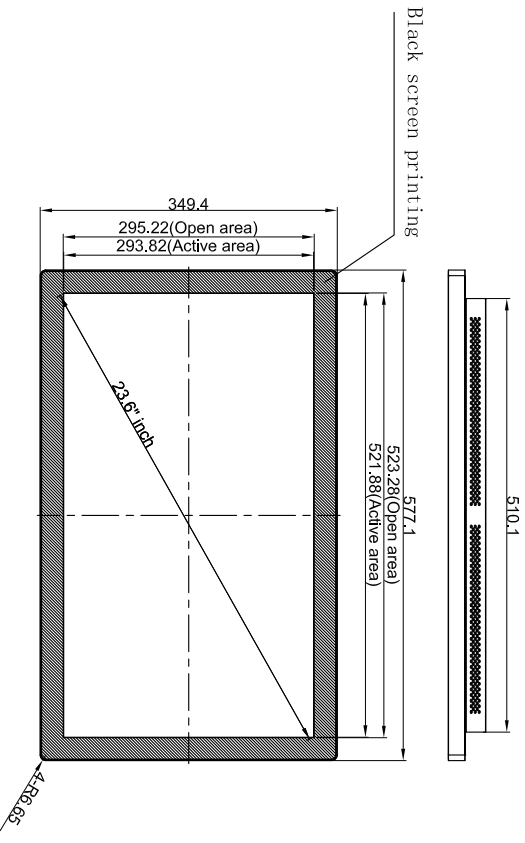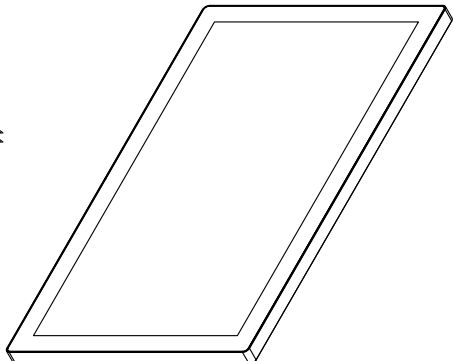

Tolerance Table	
Dimension Range	Tolerance(mm)
Under 25 mm	0.1
25.1-100 mm	0.2
100.1-250 mm	0.4
250.1-400 mm	0.8
400.1-500 mm	1.5
500.1-630 mm	2.0
630.1-800 mm	2.5

TOLERANCING

UNLESS OTHERWISE SPECIFIED ALL DIMS ARE mm

x ±0.2 RADIUS ±0.15

xx ±0.1 ANGLES ±0.5°

DO NOT SCALE DRAWING

Title: **WTM236-CU**

Date: 2017.12.13

Scale: NTS

Sheet: 1 of 1

Ver.: 01



Rev	Date	Description	By