


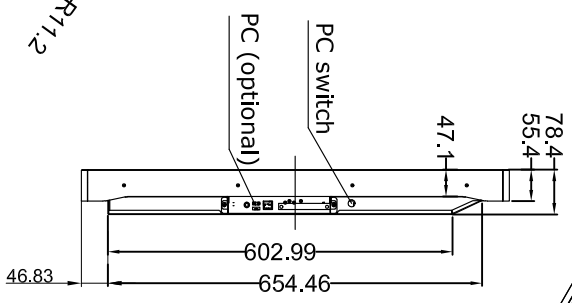


2

1

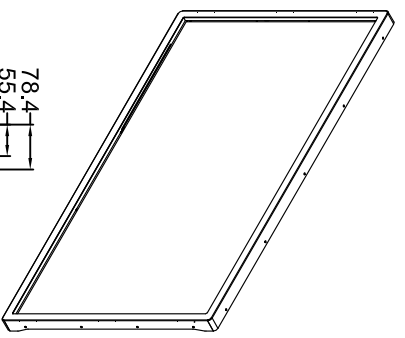

1278.2
1215.9(Open area)
1209.6 (Active area)

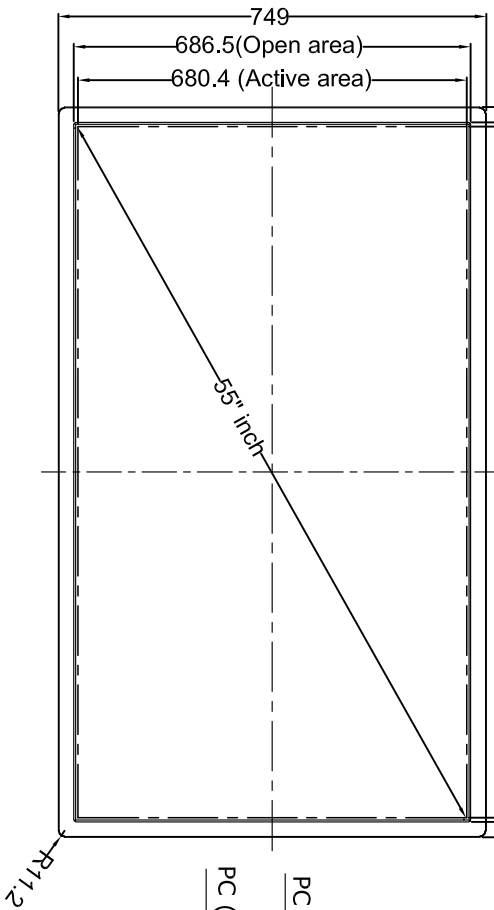

PC switch
PC (optional)

Tolerance Table

Dimension Range	Tolerance(mm)
Under 25 mm	0.1
25.1-100 mm	0.2
100.1-250 mm	0.4
250.1-400 mm	0.8
400.1-500 mm	1.5
500.1-630 mm	2.0
630.1-800 mm	2.5

TOLERANCING

UNLESS OTHERWISE SPECIFIED ALL DIMS ARE mm

X ±0.2 RADIUS ±0.15

.XX ±0.1 ANGLES ±0.5°

DO NOT SCALE DRAWING

Title: 55		Material: SPCC		Scale: NTS	
Design:		Sheet: 1 of 2		Var: 01	
Date: 2017.12.13					
Dwg No.:					

Rev	Date	Description	By

2

1

B


A

B

A


2

1

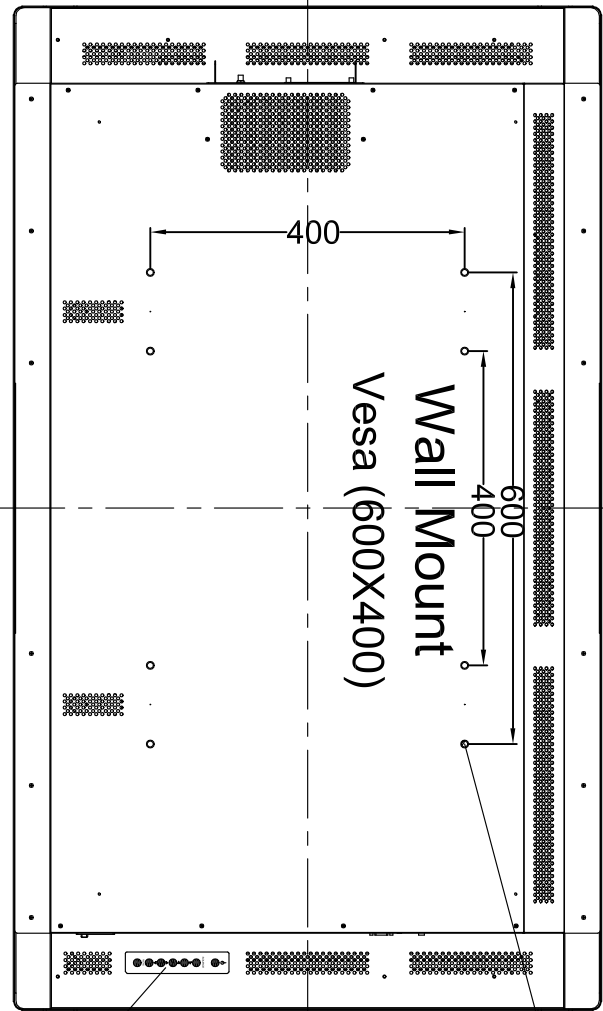

8-M8 H≤20mm

Power status led



OSD

Tolerance Table

Dimension Range	Tolerance(mm)
Under 25 mm	0.1
25.1-100 mm	0.2
100.1-250 mm	0.4
250.1-400 mm	0.8
400.1-500 mm	1.5
500.1-630 mm	2.0
630.1-800 mm	2.5

TOLERANCING

UNLESS OTHERWISE SPECIFIED ALL DIMS ARE mm

X ±0.2

RADIUS ±0.15

.XX ±0.1

ANGLES ±0.5°

DO NOT SCALE DRAWING

Title: 55

Design:

Material: SPCC

Date: 2017.12.13

Scale: NTS

Sheet: 2 of 2

Dwg No:

Var: 01



A

B

A

B

2

1

Rev	Date	Description	By